## Indac Spinwelds

Spigot BSPT Threaded


This product fits quickly togther allowing for a BSPT male threaded outlet.

The spigot fits the spinweld with driver plug.

A square drive router bit, which we can supply fits the driver plug.

The Spigot is then welded into place producing a male threaded outlet. A single or double threaded end barrel nipple can also be created by welding it into MDPE pipe with internal diameter


to match the hole saw size.




	Code	Description	Spigot	Hole Saw Size	"X"
	XSWSBSPT12	SW Spigot 1/2" BSPT Threaded	1/2"	19mm	24mm
	XSWSBSPT34	SW Spigot 3/4" BSPT Threaded	3/4"	22mm	24mm
8	XSWSBSPT1	SW Spigot 1" BSPT Threaded	1"	29mm	24mm
	XSWSBSPT114	SW Spigot 1 1/4" BSPT Threaded	1 1/4"	35mm	24mm
١	XSWSBSPT112	SW Spigot 1 1/2" BSPT Threaded	1 1/2"	44mm	24mm
١	XSWSBSPT2	SW Spigot 2" BSPT Threaded	2"	51mm	36mm





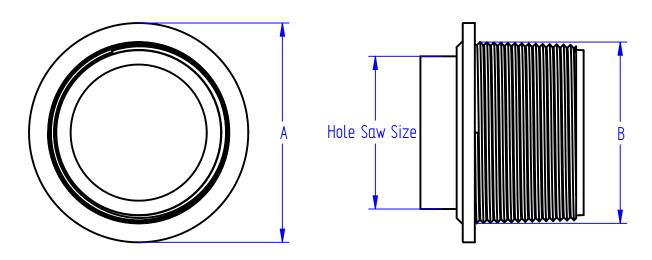



Code	Description	"A"	"B"	Hole Saw Size
XSWSBSPT12B	Spigot ½" BSPT	39mm	1/2" BSPT Thread	17.5mm
XSWSBSPT34B	Spigot ¾" BSP	43.1mm	3/4" BSPT Thread	22mm
XWSBSPT1B	Spigot 1" BSPT	48mm	1" BSPT Thread	27.3mm
XSWSBSPT114B	Spigot 11/4" BSPT	56.2mm	1 1/4" BSPT Thread	35mm
XSWSBSPT112B	Spigot 1½" BSPT	65mm	1 1/2" BSPT Thread	44mm
XSWSBSPT2B	Spigot 2" BSPT	72mm	2" BSPT Thread	50mm

Product name: Spinweld Spigot BSPT Thread

Product code: See Table Above

COPYRIGHT RESERVED

All dimensions and weights are nominal

FILE NAME: Spigot BSPT .dft

INNOVATIVE DESIGN AND CONSTRUCTION

Box 378 26 Stuart Street Blenheim, 7201 Phone: +64 3 578 3034 www.indac.co.nz www.plasticproducts.co.nz